


## Three-Terminal Positive Voltage Regulator

## LM78L18

## ■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 18V
- Continuous Total Dissipation  $P_d$ : 0.5W ( $T_a = 25^\circ\text{C}$ )

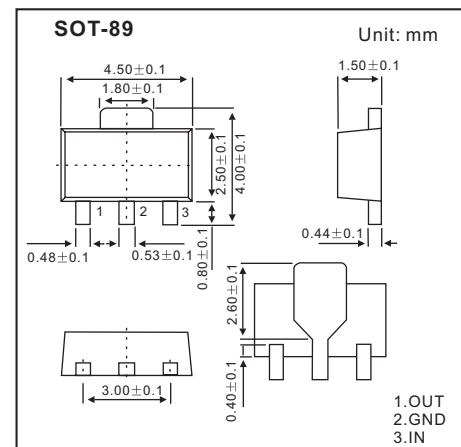


## ■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	$V_i$	35	V
Operating Junction Temperature Range	$T_{OPR}$	-55 ~ +125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

■ Electrical Characteristics ( $V_i=26\text{V}$ ,  $I_o=40\text{mA}$ ,  $C_i=0.33\ \mu\text{F}$ ,  $C_o=0.1\ \mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$T_J = 25^\circ\text{C}$	17.3	18	18.7	V
		$T_J = 0 \sim 125^\circ\text{C}$ , $20.5\text{V} \leq V_i \leq 33\text{V}$ , $I_o = 1\text{mA} \sim 40\text{mA}$	17.1	18	18.9	V
		$T_J = 0 \sim 125^\circ\text{C}$ , $V_i = 26\text{V}$ , $I_o = 1\text{mA} \sim 70\text{mA}$	17.1	18	18.9	V
Load Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $V_i = 26\text{V}$ , $I_o = 1\text{mA} \sim 100\text{mA}$		27	180	mV
		$T_J = 25^\circ\text{C}$ , $V_i = 26\text{V}$ , $I_o = 1\text{mA} \sim 40\text{mA}$		19	90	mV
Line Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $20.5\text{V} \leq V_i \leq 33\text{V}$ , $I_o = 40\text{mA}$		70	360	mV
		$T_J = 25^\circ\text{C}$ , $22\text{V} \leq V_i \leq 33\text{V}$ , $I_o = 40\text{mA}$		64	300	mV
Quiescent Current	$I_q$	$T_J = 25^\circ\text{C}$		4.7	6.5	mA
Quiescent current Change	$\Delta I_q$	$T_J = 0 \sim 125^\circ\text{C}$ , $22\text{V} \leq V_i \leq 33\text{V}$ , $I_o = 40\text{mA}$			1.5	mA
		$T_J = 0 \sim 125^\circ\text{C}$ , $V_i = 26\text{V}$ , $1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	$V_N$	$T_J = 25^\circ\text{C}$ , $10\text{Hz} \leq f \leq 100\text{kHz}$		89		$\mu\text{V}$
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ\text{C}$ , $21.5\text{V} \leq V_i \leq 31.5\text{V}$ , $f = 120\text{Hz}$	32	36		dB
Dropout Voltage	$V_D$	$T_J = 25^\circ\text{C}$		1.7		V

## ■ Typical Application

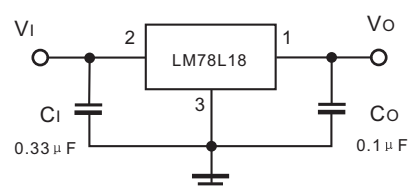

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# LM78L18

## ■ Typical Characteristics

